YZ Industrial Pump Head

YZ35-13

Max. Flow Rate

20000 mL/min

11000 mL/min

Mainly for industrial applications

Two tubing retention modes

- Continuous tubing
- Tubing with fittings

Occlusion Adjustment



① Standard position

② Decrease occlusion

③ Increase occlusion

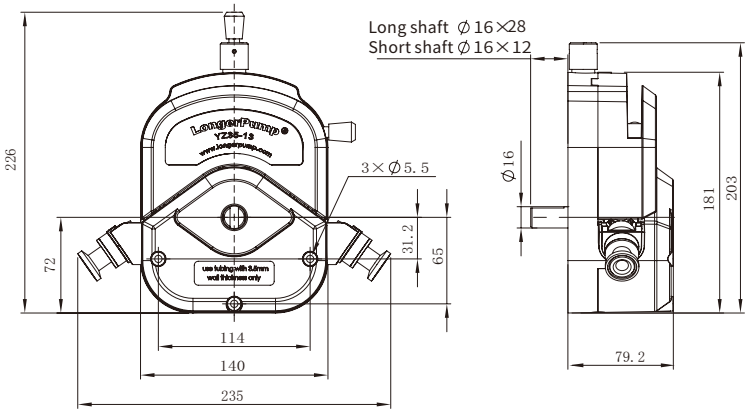

For continuous tubing

For tubing with fittings

Tubing Fitting Assembly

Model	Shaft	Product Code	Roller Number	Roller Material	Housing Material	Tubing	Speed (rpm)	Max. Flow Rate (mL/min)	Weight (kg)
YZ35-13-A	Long	05.01.58A	3	Stainless Steel	PSU	73#, 82#	⩽600rpm	11000	1.65
YZ35-13-B	Short	05.01.58B				73#, 82#	⩽600rpm	11000	
YZ35-13-C	Long	05.01.75C				73#, 82#	⩽600rpm	11000	
						82A#	⩽300rpm	8000	
YZ35-13-D	Short	05.01.75D				73#, 82#	⩽600rpm	11000	
						82A#	⩽300rpm	8000	
YZ35-13-E	Long	05.01.75E				26#	⩽600rpm	4000	
YZ35-13-F	Short	05.01.75F				26#	⩽600rpm	4000	